


# HORIZON

engineering

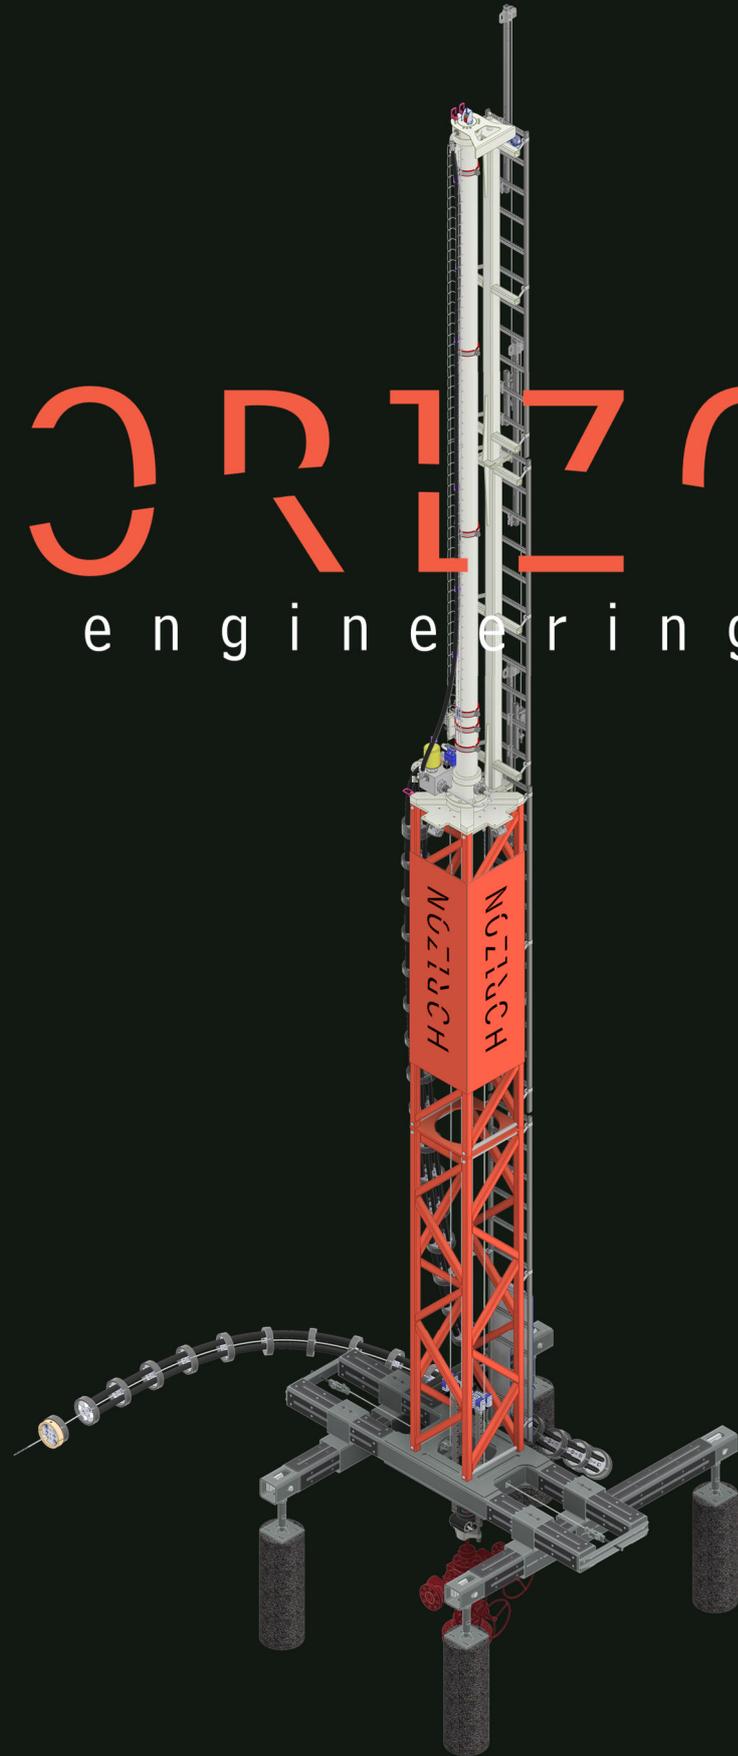

Next-Gen Long Stroke Hydraulic Rod Pump  
— Technical Specifications —

GENERAL	Type 27-150	Type 30-150	Type 40-240
Total stroke length	3.8[m] 150 [in]	3.8 [m] 150 [in]	6.1 [m] 240 [in]
Max stroke speed (full length)	7.5 [SPM]	5 [SPM]	2.5 [SPM]
Peak Polished Rod Load (PPRL)	12.2 [t] 27 [Klbs]	13.5 [t] 30 [Klbs]	18.2 [t] 40 [Klbs]


RIG	SPECIFICATION AVAILABLE FOR ALL CYLINDERS SIZE	
Stroke speed ratio adjustment	Standard	
Variable stroke length adjustment	Standard	¼" increments from 1" to total length
Slave cylinder	Standard	Two chambers cylinder with integrated measure
Carrier bar included	Standard	The system is compatible with standard polished rods up to 1½"
Rod rotator torque reaction cables	Option	Torque reaction cables prevent the hydraulic cylinder from rotating when the rod rotator is operating
Rig-IN/OUT	Standard	A sliding beam covered with HDPE wear plates allows the rig to be easily pulled back for wellhead maintenance access
Ajustable leveling system	Standard	The rig is equipped with leveling feet to ensure precise leveling and perpendicular alignment with the wellhead
Weight of the rig	~1.8 [t] 4000 [lbs]	
Total height of the rig	14 [m] 45 [ft]	
Protected access to the top of the rig	Standard	Life-line protected ladder all the way up (EN 353-1 / ANSI Z359.16 / AS 1891-3)

HYDRAULICS	SPECIFICATION AVAILABLE FOR ALL CYLINDERS SIZE	
Hydraulic Power Unit (HPU)	Standard	ISO 668 1D 10 foot container
	Sensitive area	Soundproofed ISO 668 1D 10 foot container
Continuous operation temperature	Winterized	-40 to +45 [°C] -40 to +113 [°F]
	Standard	-20 to +45 [°C] -4 to +113 [°F]
Hydraulic hoses chain line length (2x1" ¼ & 2x1")	Tropicalized	-10 to +55 [°C] 14 to +131 [°F]
	Standard	12 [m] 40 [ft]
Hydraulic oil type	Enhanced	20 [m] 65 [ft]
	Standard	Hydraulic fluids based on mineral oil
Oil conditioning system	Sensitive area	Environmentally approved fluids
	Standard	ISO 4406 15/13/10 class and water separation system
Counterbalance system with true dynamic compensation and linearized gas accumulator behavior	Standard	Fixed pressure nitrogen-bladder accumulator
	Standard	No manipulation required No nitrogen addition, no nitrogen purge
Hydraulic coupling system	Standard	Hoses chain line is connected and disconnected by a safe, simple and quick movement requiring low effort and without any leakage
Max hydraulic working pressure	350 [bar] 5000 [psi]	
Weight of the HPU	~3850 [kg] 8500 [lbs]	


ELECTROTECH. & AUTOMATION		SPECIFICATION AVAILABLE FOR ALL CYLINDERS SIZE	
Type of electrical supply / Phases	Grid / 3P+N or Genset / 3P+N		
Voltage Frequency / Power	380 to 480VAC 50/60Hz - 45 [kW] 60 [hp]		
Main motor max. power (S1)	37 [kW] 50 [hp]		
Variable Frequency Drive (VFD)	Standard		
Industrial communication	 <b>IO-Link</b> and  <b>EtherCAT</b>		
Sensor monitoring level	Standard	Essential IO-Link sensor package for key operational parameters	
	Enhanced	Extended IO-Link sensor suite for full predictive diagnostics and condition monitoring	
Pump Off Control (POC)	Standard		
Gas interference mode	Standard		
Pump clean-out routine	Standard		
Modern HMI interface	Standard	Powered by HELIO HMI	
Remote control/adjustment	In development		
Remote report and alarming	Standard	Requires subscription to HORIZON systems	
External control I/O	Standard	2DI : Coil 24..230 V AC/DC	
		2DO : Changeover contact max. 250 V AC/DC - 6A (e.g. Ext. alarm, start/stop)	

MISCELLANEOUS		SPECIFICATION AVAILABLE FOR ALL CYLINDERS SIZE	
Fire detection and suppression (HPU)	Standard	Only the electrical cabinet	
	Enhanced	Full automatic fire detection and suppression	
Improved logistics	Standard	The system features forklift pockets and lifting points for convenient transport	
Easy set up and installation	Standard	Assembly requires only a truck-mounted crane, two people and basic standard tools	
Painting C3-M (SN EN ISO 12944)	Lower structure	RAL 6012 (Black Green)	
	Tower segments	RAL 2004 (Pure Orange)	
	Upper struct. + HPU	RAL9010 (Pure White)	
Applications	Deep, Deviated, High-volume wells ESP or Gas lift conversion Gas wells deliquification Heavy oil wells		
Replace/competitive to	Rotaflex, Conventional & Enhanced Geometry Pumping Units		
Customization	HORIZON engineering remains open to considering any requests outside its standard scope		


### Cylinder type 40-240 PPRL 40 klbf

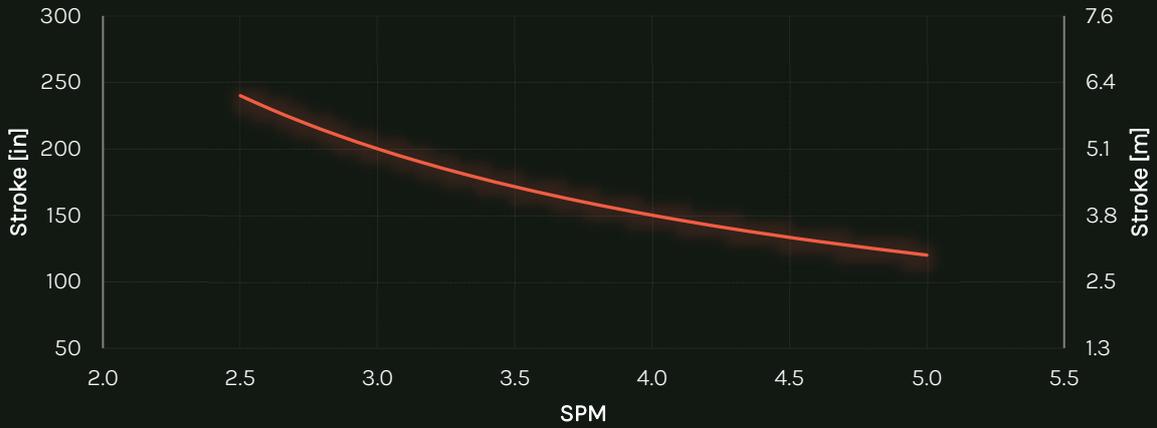

### Cylinder type 30-150 PPRL 30 klbf

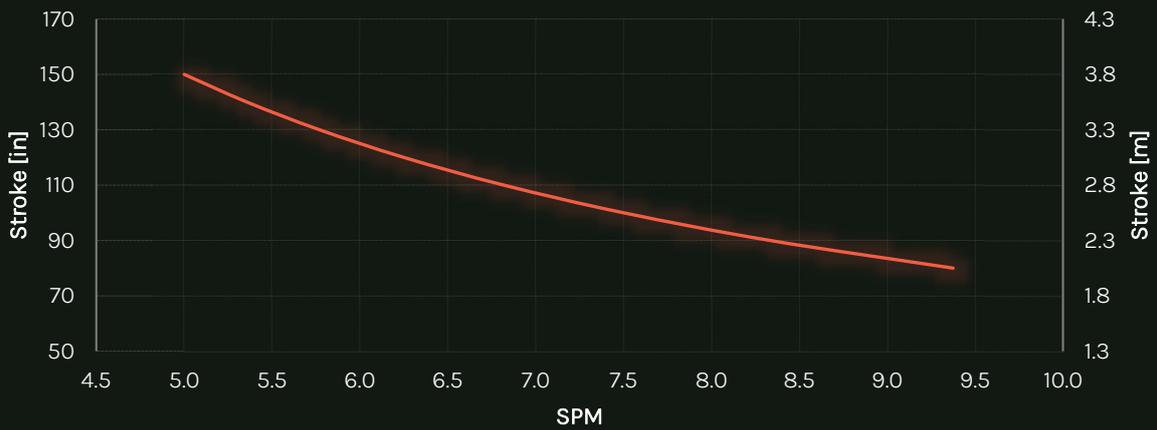

### Cylinder type 27-150 PPRL 27 klbf

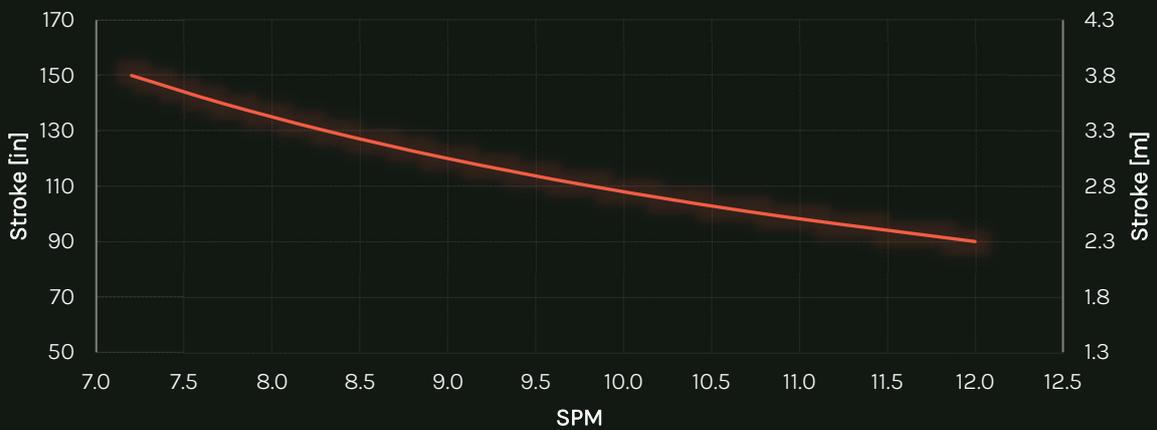


# AUTOMATION

## Adaptive Extraction via Onboard Machine Learning AI\*

Leveraging our existing industrial automation platform, we are now integrating machine learning directly into the control layer to enable real-time, intelligent adaptation of extraction parameters to dynamic well conditions.

### Current Automation

- Real-time monitoring & control via EtherCAT
- Predictive maintenance & fault detection
- Remote diagnostics & parameter tuning

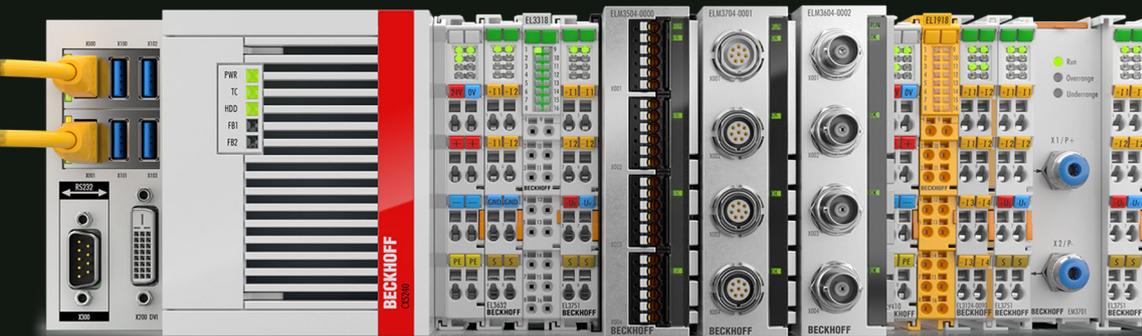

### What's Next : The AI Leap !

- ML engine embedded in PLC – future software upgrade
- Learns from live sensor data – pressure, flow, torque, temperature
- Dynamically adjusts stroke rate & length – per well, per cycle
- Self-optimizes for reservoir changes – no manual intervention

### Result

Smarter extraction.




Higher uptime.

Lower OPEX.

Better ROI.



*\*under development*

6 5 4 3 2 1

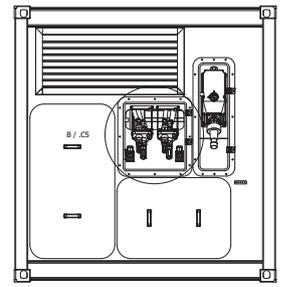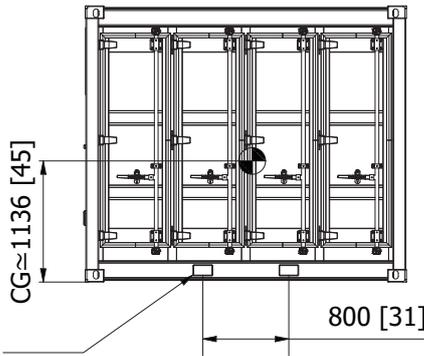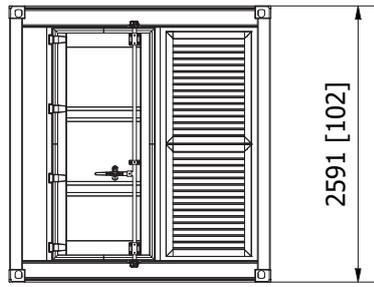

Through forklift pockets (170x90) [7x4]



B (1 : 10) / .D1

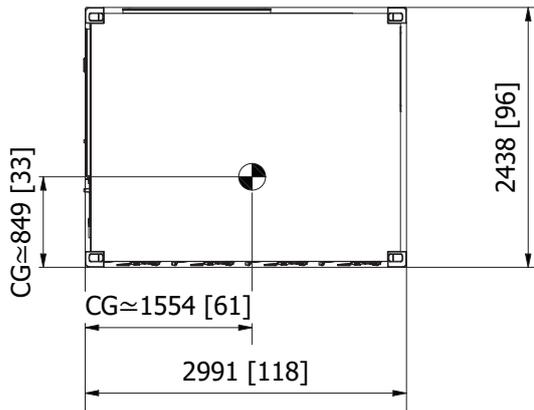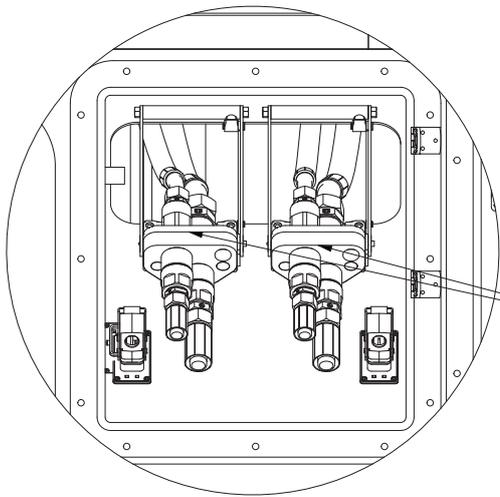

Simple quick hydraulic coupling levers

- No leaks
- Connection under pressure
- No contamination of the circuit
- With parking station when disconnected

4x access doors to the hydraulic accumulators

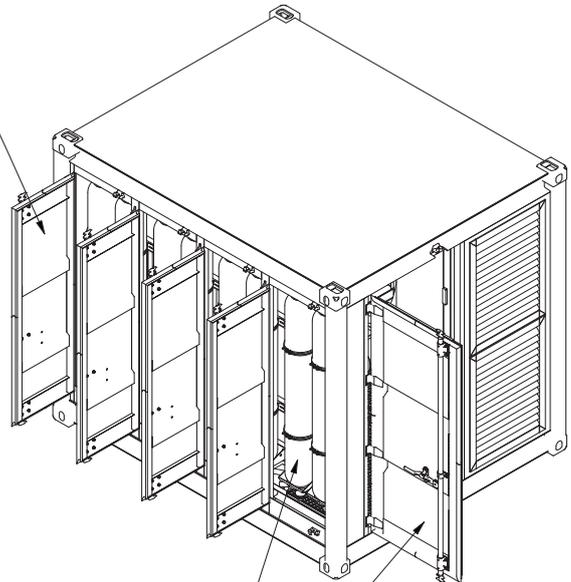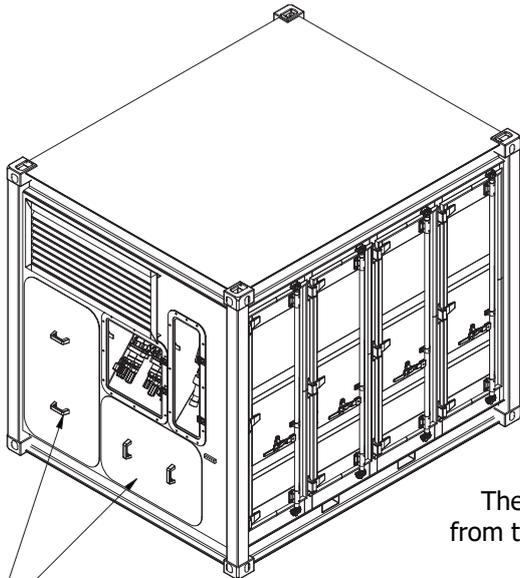

The hydraulic accumulators are separated from the rest of the container by a steel wall

Main access door

Access hatches for maintenance

Hydraulic Tank Capacity = 350dm<sup>3</sup> [93 USgal]  
Weight of the rig = ~8500 [lbf]

Walk-in hydraulic HPU 45kW (60HP)  
Drawing scale 1 : 40

THIS DOCUMENT IS THE EXCLUSIVE PROPERTY OF HORIZON ENGINEERING.  
ALL INFORMATION AND DATA CONTAINED HEREIN ARE CONFIDENTIAL, PROPRIETARY AND PROTECTED BY APPLICABLE COPYRIGHT LAWS AND ISSUED PATENTS.  
NO PART OF THIS DOCUMENT MAY BE REPRODUCED, DUPLICATED, PUBLISHED, MODIFIED, TRANSMITTED, SOLD, DISTRIBUTED OR OTHERWISE USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HORIZON ENGINEERING.

**HORIZON**


engineering

<https://horizonengineering.ch/>

6 5 4 3 2 1

6 5 4 3 2 1

Stroke length = 240"  
 PPRL = 40000 [lbf]  
 Max SPM = 2.5  
 Weight of the rig = 4000 [lbf]

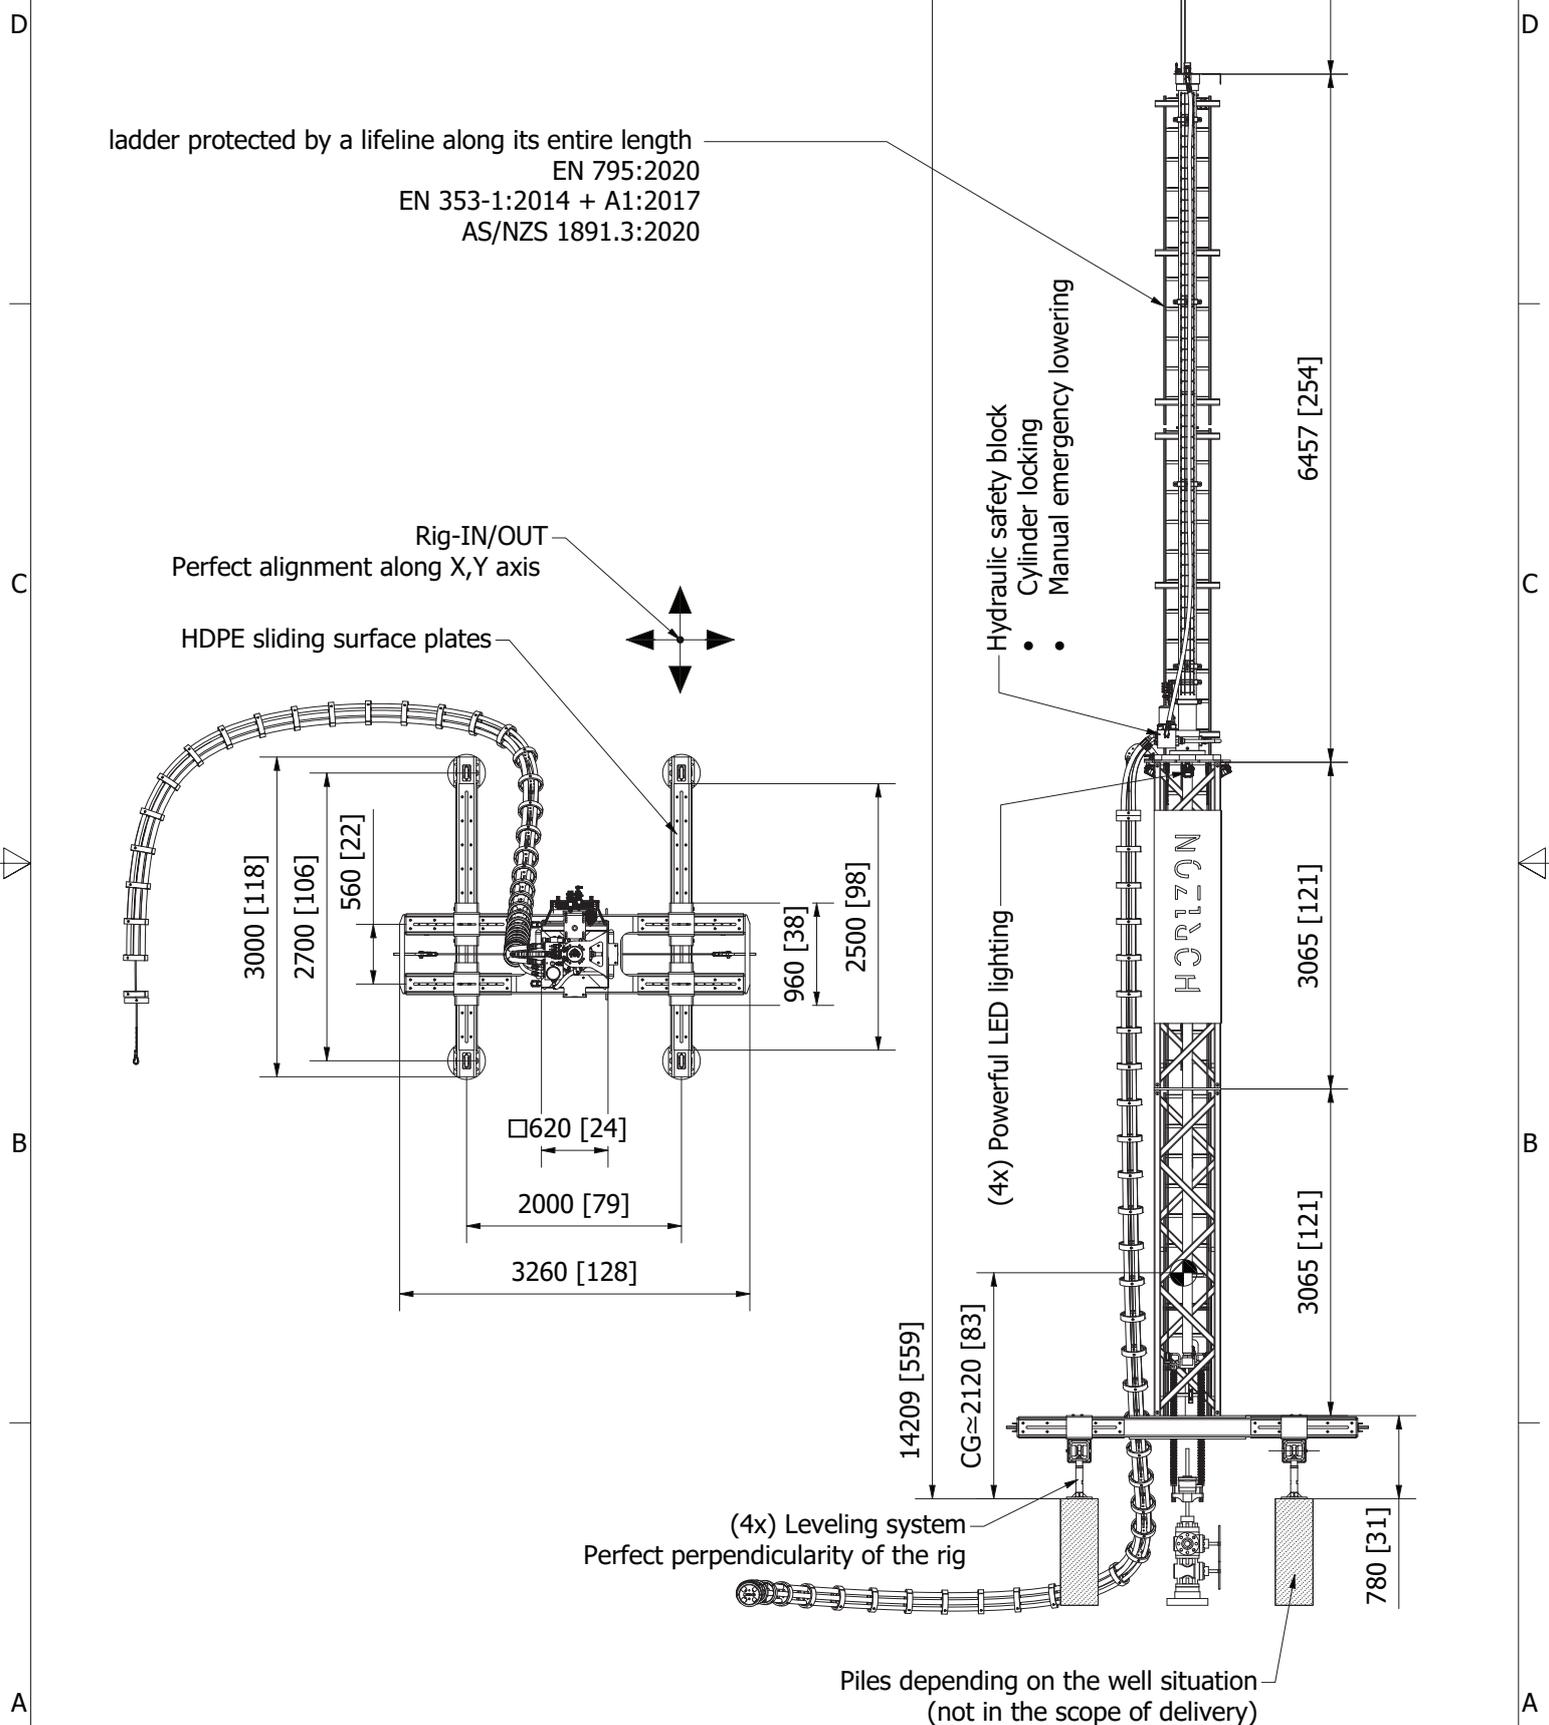

**Hydraulic Long Stroke Rod Pump**  
 Drawing scale 1 : 50

THIS DOCUMENT IS THE EXCLUSIVE PROPERTY OF HORIZON ENGINEERING.  
 ALL INFORMATION AND DATA CONTAINED HEREIN ARE CONFIDENTIAL, PROPRIETARY AND PROTECTED BY APPLICABLE COPYRIGHT LAWS AND ISSUED PATENTS.  
 NO PART OF THIS DOCUMENT MAY BE REPRODUCED, DUPLICATED, PUBLISHED, MODIFIED, TRANSMITTED, SOLD, DISTRIBUTED  
 OR OTHERWISE USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HORIZON ENGINEERING.



<https://horizonengineering.ch/>

6 5 4 3 2 1

# HORIZON

engineering

Let's power the future together!



[horizonengineering.ch](https://horizonengineering.ch)

proudly made in Switzerland 